


GCF METAL SEATED GATE VALVE SERIES 4300

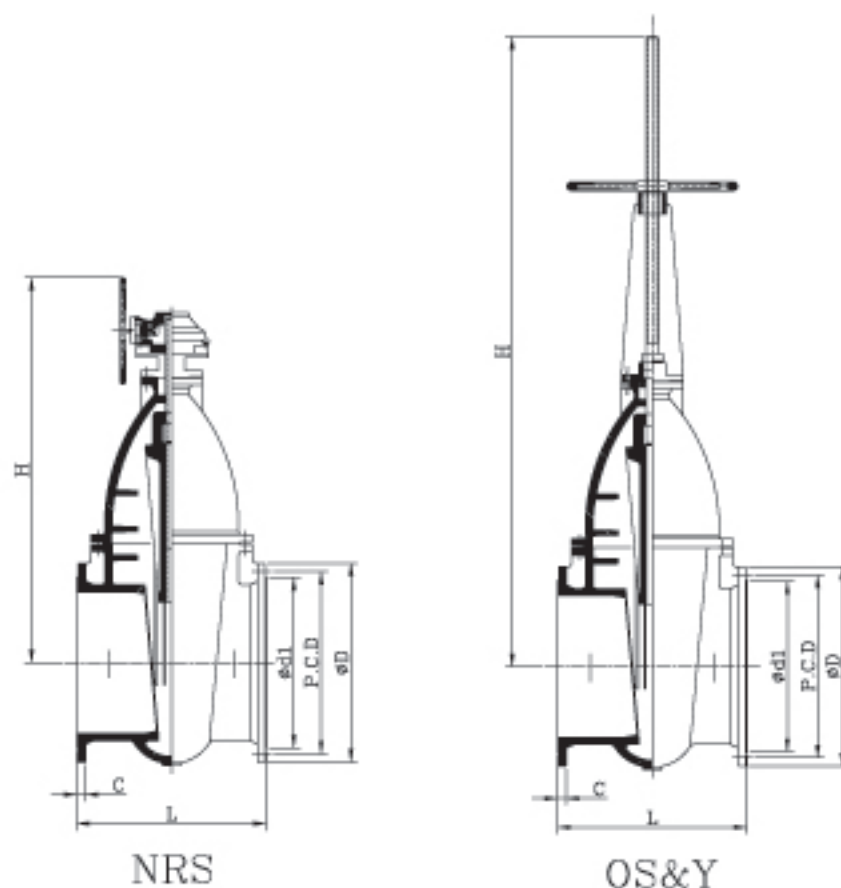

SERIES 4300 NRS and OS&Y

DIMENSIONS IN MM

Size DN	L	Maximum height		weight .Approx (kg)		PN10						PN16					
		H (NRS)	H (OS&Y)	NRS	Y& OS	D	d1	C	Bolt hole details			D	d1	C	Bolt hole details		
									p.c.d	Ø	no.				p.c.d	Ø	no.
300	500	1340	1700	590	610	455	370	24.5	400	23	12	455	370	24.5	410	28	12
350	550	1400	1950	650	670	505	429	24.5	460	23	16	520	429	26.5	470	28	16
400	600	1500	2100	700	740	565	480	24.5	515	28	16	580	480	28	525	31	16
450	650	1600	2500	750	790	615	527	25.5	565	28	20	640	544	30	585	31	20
500	700	1800	2600	900	955	670	582	26.5	620	28	20	715	609	31.5	650	34	20
600	800	2000	3000	1400	1470	840	682	30	725	31	20	840	720	36	770	37	20
700	900	2300	3500	2100	2175	910	794	32.5	840	31	24	910	794	39.5	840	37	24
800	1000	2400	3800	3000	3100	1025	901	35	950	34	24	1025	901	43	950	40	24
900	1100	3000	4400	3600	3640	1125	1001	37.5	1050	34	28	1125	1001	46.5	1050	40	28
1000	1200	3100	4600	4000	4175	1255	1112	40	1160	37	28	1255	1112	50	1170	43	28
1200	1400	3600	5500	6200	5810	1485	1328	45	1380	40	32	1485	1328	57	1390	49	32
1400	1450	4200	6300	8000	9450	1685	1530	46	1590	43	36	1685	1530	60	1590	49	36
1500	1500	4500	6800	11000	11570	1820	1640	47.5	1700	43	36	1820	1640	62.5	1710	56	36
1600	1550	4600	7100	--	--	1930	1750	49	1820	49	40	1930	1750	65	1820	56	40
1800	1600	4880	4500	--	--	2130	1950	52	2020	49	44	2130	1950	70	2020	56	44

GCF reserves the right to change the above dimensions without any prior notice